

JEEP Avenger 2022


Patent pending
MOCSKT 0485

MOCSRR0AC0010 cm 110


MOCSRR0AL0006 cm 110




1 - L1341/1 ant. sx.

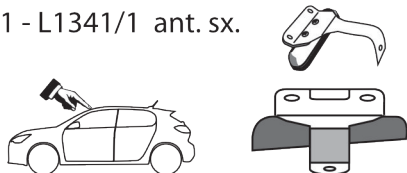

2 - L1314/3 post.

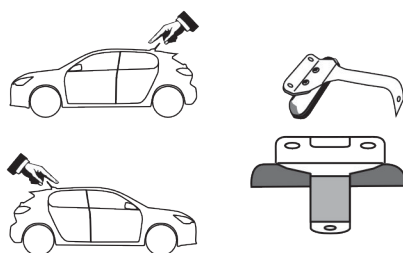

4 - L1058/7



4 - RCVM6X16TSQ



4 - RCRD8Q



8 - RCVM6X9Q




1 - RCBR5



1 - RCBR4





1 - L1341/2 ant. dx.

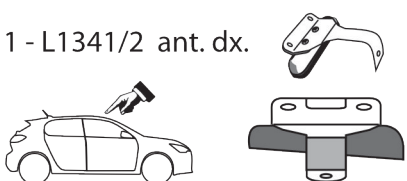

L1341/1



L1058/7




L1341/2



L1058/7




4 Nm

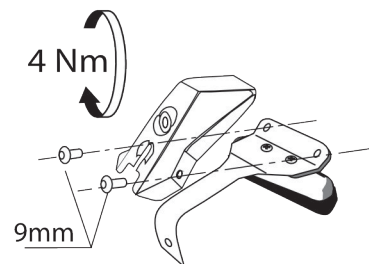


L1314/3




L1058/7




L1314/3



L1058/7




4 Nm


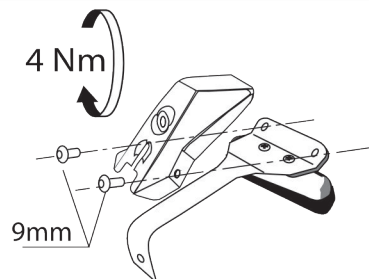


MOCSRR0AC0010 cm 110

MOCSRR0AL0006 cm 110

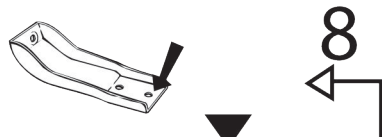




anteriore, avant, front,
vorne, delantera




12 11 10 9 8 7 6 5 4 3 2 1

1 2 3 4 5 6 7 8 9 10 11 12


4 Nm

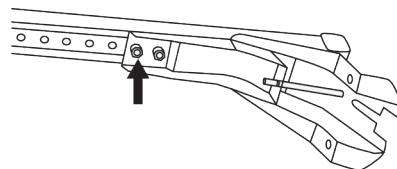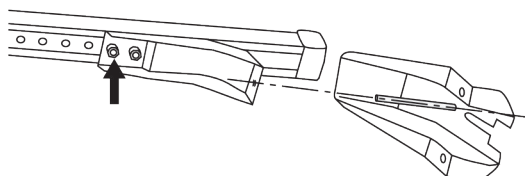








!!!



MOCSRR0AC0010 cm 110
MOCSRR0AL0006 cm 110

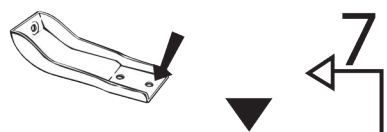

posteriore, arriere, rear,
hinten; trasera

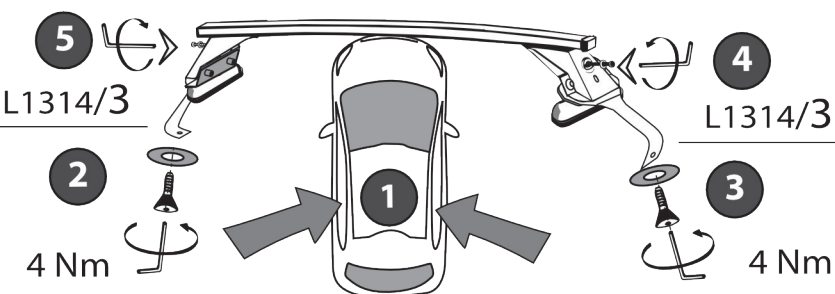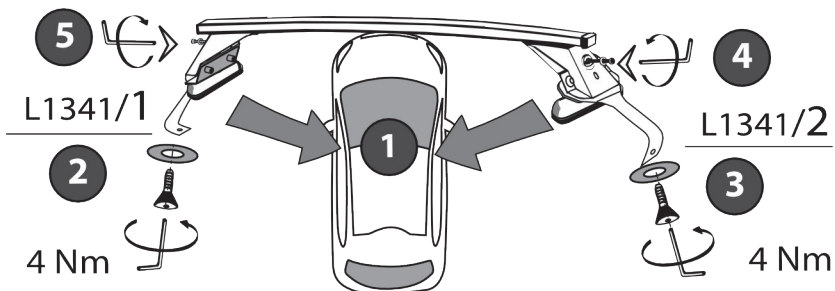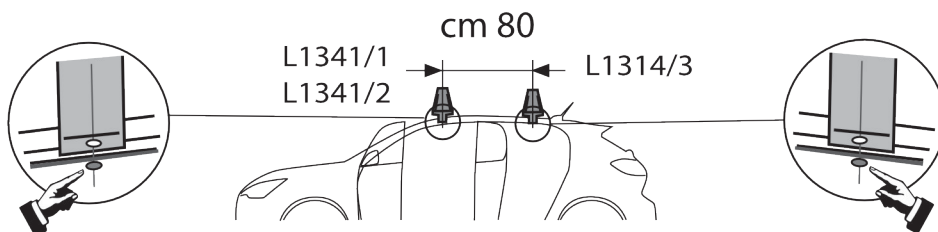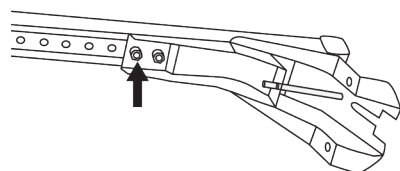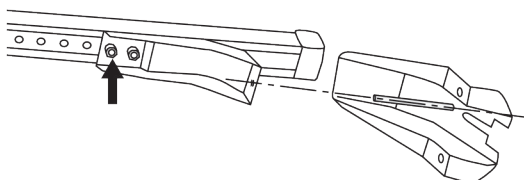

I - Per stringere, usare la chiave come indicato nel disegno. (Non si assumono responsabilità per danni causati dall'impiego di chiavi diverse da quella in dotazione al prodotto).
F - Pour serrer, utiliser la clé comme indiqué ci dessous.

GB - To tighten please use the wrench as per the drawing.
D - Zum Anziehen benutzen Sie bitte den Inbusschlüssel, nur wie auf dem Bild dargestellt.
E - Para el correcto ajuste, utilizar la llave fija tal y como se indica en la imagen

